



BLUSoda BOX

8
GAL/h12
GAL/hstainless
STEELDRY
COOLING

fizz

BLUSODA BOX 30 FIZZ BLUSODA BOX 45 FIZZ


Cooling capacity (gal/h)	8	12
Max continuos supply (gal)	2	3
Cold water temperature*	41 - 53.6 °F	
Pump	Professional membrane carbonation pump	
Cooling technology	Aluminum fusion block - stainless steel coil	
Condensation	Forced ventilation	
Refrigerant gas	R134a	
Adjustable thermostat	Yes	
Supply	115 V - 60 Hz	
Compressor power	1/6 HP	1/4 HP
Absorbed power	200 W - 2 A	300 W - 3 A
Working room temperature	Min 61°F - Max 90°F	
Inlet water pipe	Ø1/4"	
Inlet CO ₂ pipe	Ø1/4"	
Typology	Undercounter	
Net weight (lb)	55	68
Gross weight (lb)	59	75
Dimensions W x D x H (in)	10.2 x 16.4 x 16.4	12.5 x 17.3 x 18.4
Packaging dimensions (in)	13.8 x 22.8 x 20.1	15.3 x 22.8 x 21.6

Dispensing options	Cold still water, cold sparkling water and room temperature water
Materials	Parts in robust stainless steel and aluminum


OPTIONAL

Water pressure reducer	
CO ₂ pressure reducer	
Filters	Activated carbon filter (inside)
Taps	Electronic or mechanical

* rated at a room temp. of 77 °F and inlet water temp. of 68 °F
 For a proper installation of the system, the use of the WATER BLOCK is compulsory.

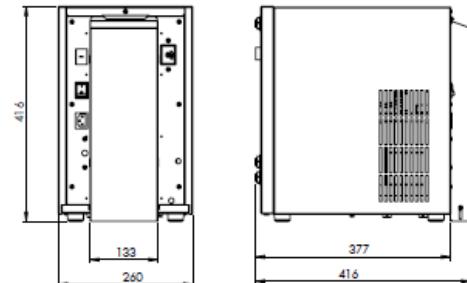

Blusoda Box 30

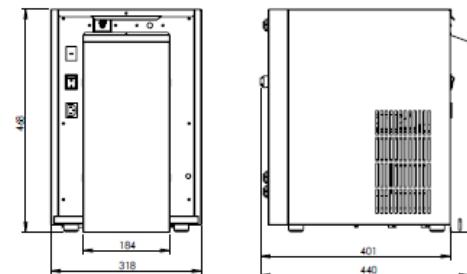

Blusoda Box 45

CERTIFICATIONS



DM 174/04