

A close-up photograph of a bartender's hands garnishing a drink. The bartender is using a metal zester to grate citrus zest into a coupe glass filled with a golden, frothy beverage. The scene is lit with warm, dramatic lighting, highlighting the texture of the foam and the fine particles of zest falling into the glass. In the foreground, a small white ceramic cup sits on the left, and a large, frosty metal shaker is on the right. The background is dark and out of focus.


BROOD[®]

DRNX BY BROOD

DRNX MIX

BUILT FOR
CONCENTRATES

Recommended for:
Very High Volume Locations; Canteens, OCS, Hotels, Catering

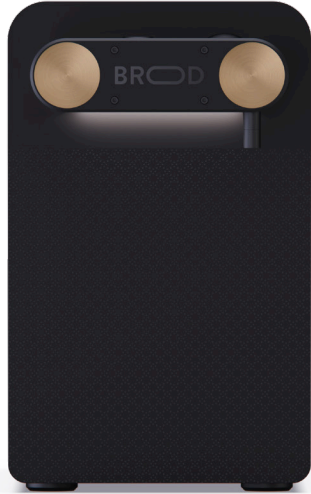


The DRNX MIX - built for use with concentrates - introduces a digital screen that enables users to dynamically adjust concentrate ratios for optimal taste and Brix levels. This innovation is revolutionizing the beverage industry by reducing costs per drink, all in a compact design.

PRODUCT FEATURES:

- **Precision Cooling:** Refrigerated 1.5-gallon internal reservoir consistently chilled at 2°C.
- **Compact:** A superior substitute for cumbersome kegerators, providing efficiency in a compact form.
- **Quick Installation:** 2-minute installation without the requirement for tools or accessories.
- **Brewing Options:** Directly pour ground coffee and water to create your own cold brew from scratch, or pour fresh cold brew.
- **Mixing Capabilities:** Ideal for prebatching mocktails within the reservoir, ensuring consistency in taste, temperature, and appearance from pour to pour.
- **Infusion:** Effortlessly switch between nitro and still options with the simple press of a button.


01 CONNECT

Connect to any concentrate beverage container or bag-in-box. Connect direct to water line.

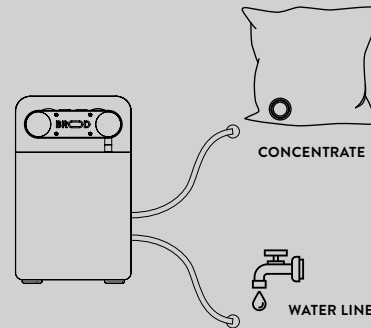


02 CHOOSE NITRO OR STILL

Press the infusion button for the creamy goodness of nitro infusion. De-press the infusion button for a traditional, still cold brew.

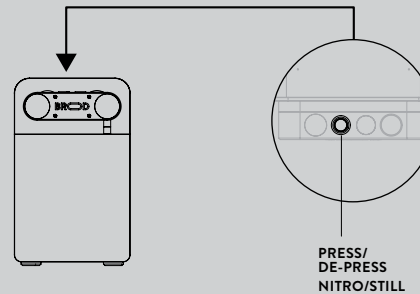

03 POUR

After connecting, raise a glass and select nitro or still. Press the pouring button. Beverage ready for sipping in under 12 seconds.

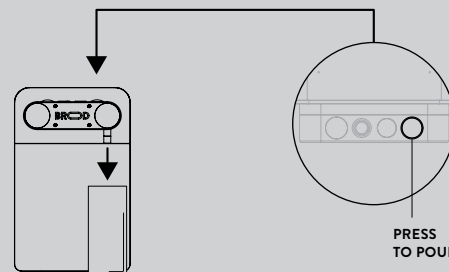


PRODUCT SPECS

FUNCTION	COLD NITRO & COLD STILL
TAPS	1
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE
AMPS	2.8A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN
WEIGHT	78LBS
DISPENSING CAPACITY	102 L/HOUR
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR
WARRANTY	1 YEAR
PRESSURE AT TAP	34 PSI
INPUT BEVERAGE	CONCENTRATE
WATER ACCESS	YES
WATER ACCESS INLET	¼IN BARB
DRAINAGE	NOT REQUIRED
RATIO RANGE	1:1 TO 13:1
DISPENSE OPTIONS	PUSH BUTTON OR, TAP HANDLE

USE WITH

Quick Connect Cold Brew Bag-In-Box, or any Container

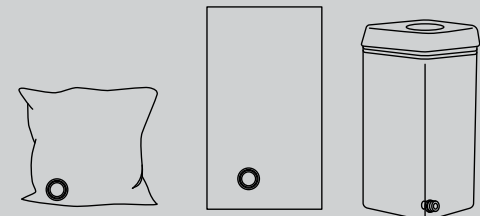

OPTIONAL FITMENTS FOR BiBs AVAILABLE

VITOP/SMURFIT KAPPA | SCHOLLE IPN VARIOUS MODELS
CORN/SANKE COUPLER | ANY MALE/FEMALE QUICK CONNECT



INFUSION

AVAILABLE AT WWW.KEGOUTLET.COM